



1300 301 755
SAYFA.COM.AU

**PRODUCT
SPECIFICATION**

PRODUCT CODE
AP 130.10

DESCRIPTION
3 SIXTY ANCHOR

PROPRIETARY FALL ARREST
SYSTEM FOR SAFE WORK
AT HEIGHT

PRODUCT
BROCHURE




3 SIXTY® ANCHOR, FALL ARREST RATED AT 15kN



The 3 Sixty Permanent Anchor Point is ideally suited to maintenance personnel working at heights utilising a harness and lanyard fall protection system. The 15kN fall arrest rated anchor point incorporates a unique energy absorbing swivel eye lanyard attachment point, eliminating snap hook roll-out and providing uniform load distribution to the anchor plate and allowing fixture to lighter structures and roof decks.

- Simple, quick installation
- Swivel eye prevents snap hook roll-out
- Low aesthetic profile - limiting visual impact
- Varied roof deck fixing options
- Uniform load distribution in the event of a fall
- Maintenance of gutters and edge flashings
- Roof mounted equipment inspection and maintenance
- Maintenance and cleaning of clerestory windows and skylights

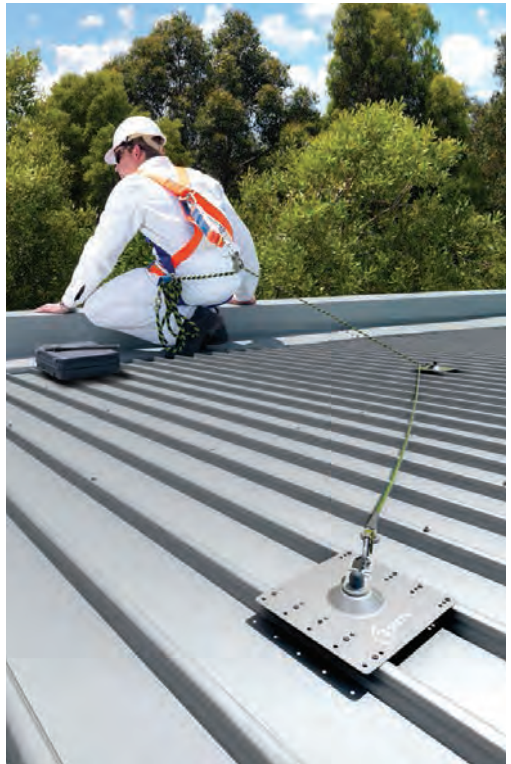


INSTALLATION

- Simple, installation attaching to roof deck and purlin structure
- Suits multiple deck profiles
- No on-site assembly required
- All fixings and penetration seals provided


USER SUPPORT

- Safe use and maintenance manuals provided with each system
- DVD system induction available on line
- Hands on system training of personnel provided
- System maintenance and recertification managed and provided by Sayfa Group

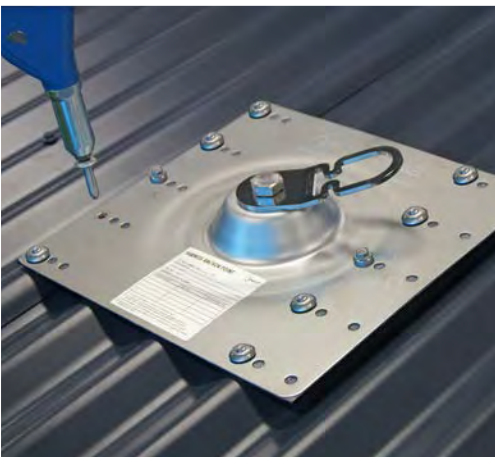

3 SIXTY® FOR PERSONNEL WORKING AT HEIGHT WHO USE A HARNESS AND LANYARD FALL PROTECTION SYSTEM


FEATURES & BENEFITS



- 360° ROTATIONAL EYELET**
- Ensures no snaphook roll-out
 - Large eye for easy attachment




- PROFILED DOME**
- Ensures no interference with roof deck rib
 - Allows free rotation of eyelet




- 14G TEKSCREW INTO STRUCTURE**
- Positive attachment to roof structure (steel purlin or timber structure)




- SERIAL IDENTITY NUMBER**
- Allows traceability and identification



- MULTIPLE FIXING LOCATIONS**
- Suits varying roof deck pitch
 - Suits screw and rivet fixing




- STAINLESS STEEL PROFILED PLATE**
- Suited for harsh environments
 - Robust construction



- 8MM BULBTITE RIVET**
- High pullout resistance
 - Quality penetrations seal



- ENERGY ABSORBING EYELET**
- Reduces load on operator and roof structure in a fall situation
 - Allows attachment to light grade structure

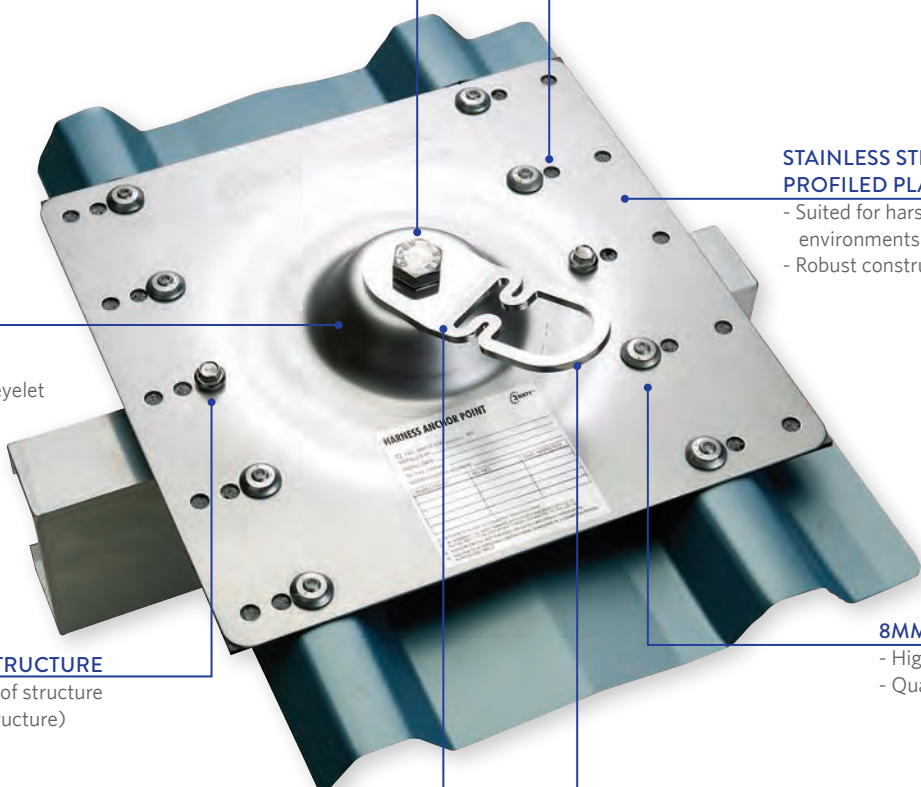

UNIQUE
PRODUCT FEATURE

360° TOP MOUNT ANCHOR

FOR MULTI-DIRECTIONAL USE

The rotational deforming eyelet provides significant load reduction in a fall situation, minimising injury to the operator as well as excessive impact loads to the anchor structure. As a result, performance on lighter structures is enhanced whilst allowing maximum install flexibility.

PATENTS AND DESIGN REGISTRATIONS APPLY



3 SIXTY® ANCHOR

Sayfa Group leads the industry in the design, installation and management of access, fall protection and ground safety systems.

The In-Action model demonstrates access, fall and ground protection requirements for a standard commercial building design.

Sayfa Group recommendations fulfill current workplace requirements for the safety of building maintenance subcontractors, employees and the general public.

#	DESCRIPTION	
1	3 SIXTY	Fall arrest anchors
2	TRAVEL 8	Top or roof mount static lines
3	SENTRY	Wall or side mount guardrails
4	ON-TRAK	Fibre walkways (yellow or grey)
5	PROTEX	Skylight protectors
6	RAPTOR	Overhead rail systems

#	DESCRIPTION	
7	KATT	Modular fixed ladders
8	VISTA	Modular fold down ladder systems
9	ALTO	Step ladders & step bridges
10	ALTO	Stairs & platforms
11	MODDEX	Handrails & balustrades
12	SKYDORE	Roof access hatches

For more information, please contact Sayfa Group directly.



IT'S THE SAYFA WAY

TECHNICAL SPECIFICATION

PRODUCT SPECIFICATION

PRODUCT CODE
AP 130.10

DESCRIPTION
3 SIXTY ANCHOR

SYSTEM CODE
3 SIXTY FALL ARREST ANCHOR
AP 100

TECHNICAL DATA

MATERIALS

- Base plate – profiled stainless steel
- Swivel eye – profiled stainless steel

DIMENSIONS

- Total height – 50mm
- Overall size – 290mm x 285mm

WEIGHT

- 1.05kg (excludes fixings)

FIXINGS

- Timber purlin fixing – 14g/ 75mm type 17 Tek screws
 - Metal purlin fixing – 14g/ 75mm self drilling Tek screws
 - Metal roof deck fixing – 8mm structural Bulbtite rivets
- (Refer instruction manual)

WORKING LOAD LIMIT

Single person use

- Support structure integrity, suitability and fixing method to be assessed and determined by a competent person prior to installation.
- 3 Sixty Anchor Point must be used in conjunction with an approved harness and lanyard system incorporating an energy absorber.

COMPLIANCE

3 Sixty Anchor Point is designed and manufactured in accordance with requirements of Australian Standard AS/NZS 1891.4:2009 and AS/NZS 5532:2013 and relevant statutory OHS Codes of Practice/Guidelines.

TESTING

Testing and performance based on requirements of Australian Standard AS/NZS 5532:2013.

- Dynamic load tested – 15kN
- Static load tested – 15kN

PRODUCT WARRANTY

10 years from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations.

INSPECTION AND MAINTENANCE

Inspection and certification required every 12 months by competent person in accordance with manufacturer's specifications and requirements of Australian Standard AS/NZS 1891.4:2009 Section (9). (Refer instruction manual.)

IMPORTANT NOTE

Failure to supply and/or install proprietary product in accordance with above standards and codes, specifications and instructions voids complete system certification and/or warranty.





1029 MOUNTAIN HWY
BORONIA VIC 3155
AUSTRALIA

T 1300 301 755
F 1300 881 092
E INFO@SAYFA.COM.AU

FOR MORE INFORMATION
VISIT SAYFA.COM.AU



THE SAYFA GROUP

WE SAVE LIVES!

This is our Mission, and it drives our Vision to BRING EVERY WORKER HOME SAFELY.

Sayfa Group leads the industry in the design, installation and management of access, fall protection and ground safety systems. As an Australian owned company, we engineer and rigorously test our proprietary systems to exceed national and international standards. Simple installation and easy to use systems are our key drivers for ensuring maximum effectiveness and improved safety ensuring compliance with Occupational Health and Safety standards in the workplace.

OUR VALUES

We are governed by the following principles in everything we do:

- A – Accountability / Totally responsible and answerable for our actions.
- L – Loyalty / Steadfast and dependable based on our values in our dealings with one another.
- I – Integrity / Honest and sincere, we do what we say, on time every time.
- V – Value Driven / Increase what's of value in view of a win win plan for all.
- E – Enthusiastic / Motivated and inspired to continuously perform better.

COMMITMENT

We are passionate about our work with every product a testament to our commitment of world class safety, quality and performance. Our obligation is to live up to our own high standards as well as those of our customers and stakeholders ensuring total peace of mind.



PRODUCT IS OWNED BY THE SAYFA GROUP.
THE SAYFA GROUP CONSISTS OF:

