




500P

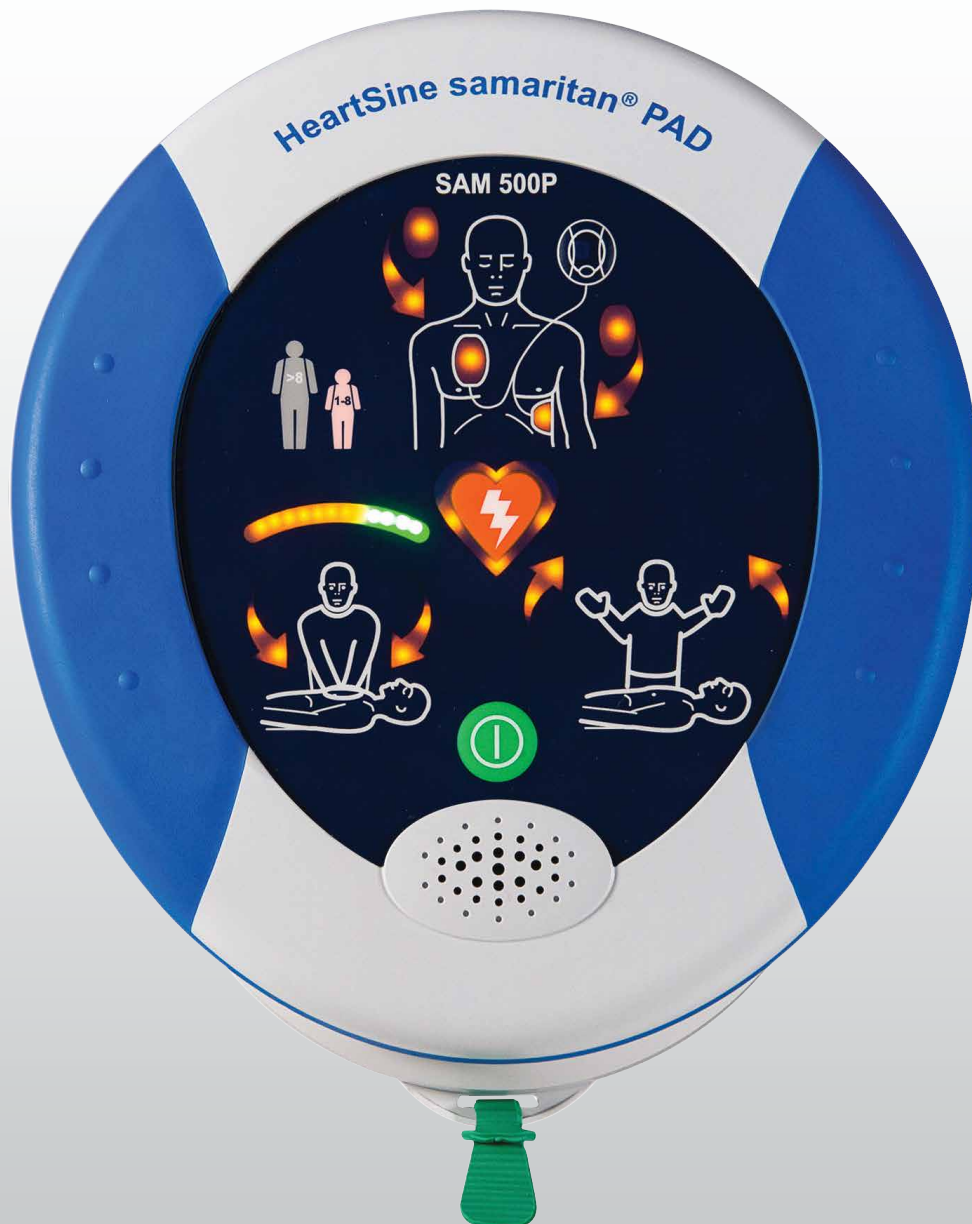

Your best fighting chance.™

FEATURES AND BENEFITS



Extra Protection

Higher water and dust protection rating than ANY other AED. IP56 Certified



Tough & Ready

Comes with a shock-proof carry case. Can be operated from within the case, saving precious seconds in an emergency



Keeps the Rhythm

Always prompts you what to do next. Provides a metronome to keep your CPR in time with the beat.




All about CPR

Audio and Visual prompts instruct whether you need to "Push Harder" or "Push Faster" ensuring CPR is effective



Low Cost

battery & pads are combined in one cartridge with a 4-year life. This makes it simple to monitor the expiry and cuts costs



Simple Operation

Easy 3-step operating procedure with visual & audio prompts



Call: 1300 308 308
Visit: www.gmacsafety.com.au





SAMARITAN 500P

DEFIBRILLATION IS EASY, CPR IS THE HARD PART...

Regardless of whether it is a lay person or a professional rescuer, the ANZCOR guidelines place great emphasis on the importance of CPR and advocate the prompt initiation of effective bystander CPR to significantly reduce mortality due to out-of-hospital Cardiac Arrest (CA). HeartSine can now provide a device to support these guidelines by the introduction of the **HeartSine samaritan PAD 500P**.


EASY-TO-FOLLOW GUIDES

Built-in confidence. The samaritan PAD 500P uses an Impedance Cardiogram (ICG) to assess the effectiveness of the CPR and give the rescuer feedback on compressions.

User-friendly. Easy-to-understand visual and voice prompts guide a user through the entire process.

Always ready. A System Status Ready Indicator flashes to show that the complete system is operational and ready for use. The AED also automatically runs a regular self check.

Visual LEDs

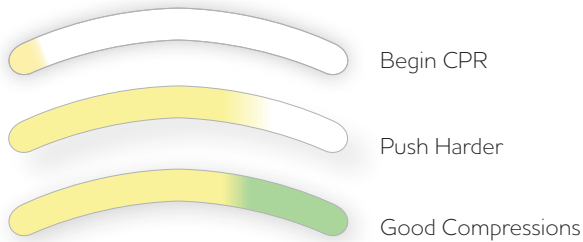


Audio Commands

"Push Faster"
"Push Slower"
"Push Harder"
"Good Compressions"



COMPACT IN SIZE, BIG ON ABILITY



Highest level of dust/moisture protection. The samaritan PAD has a rating of IP56, providing the highest level of protection from dust or water ingress in the industry.

Durable. The samaritan PAD 500P resists shock and vibration and comes with a shock-proof carry case free of charge

Advanced technology. The samaritan PAD 500P utilizes proprietary electrode technology, advanced and stable firmware, and patented SCOPE™* Biphasic Technology to assess rhythm and recommend a shock if defibrillation is necessary.

*See overleaf for more information



PAD PAK TECHNOLOGY

Low cost of ownership.

Pad Pak cartridge has a shelf life of four years from date of manufacture, offering significant savings over competitive defibrillator brands that require separate battery and pad units.



Combined expiration date.

Cartridge combines battery and electrode pads, with one expiration date to monitor.

Great for children.

The HeartSine PAD's built-in intelligence and unique pediatric Pad-Pak ensure the appropriate energy level is delivered for children.

PHYSICAL WITH PAD-PAK™ INSERTED

| | |
|---------|---------------------------------|
| Size: | 20cm x 18.4cm x 4.8cm |
| Weight: | 1.1kg including Pad-Pak battery |

DEFIBRILLATOR

| | |
|-----------|--|
| Waveform: | Self-Compensating Output Pulse Envelope (SCOPE) Biphasic waveform. Optimized biphasic escalating waveform compensates energy, slope and envelope for patient impedance |
|-----------|--|

PATIENT ANALYSIS SYSTEM

| | |
|--------------------------|---|
| Method: | Evaluates patient's ECG, signal quality, electrode contact integrity and patient impedance to determine if defibrillation is required |
| Sensitivity/Specificity: | Meets ISO 60601-2-4 and AAMI DF80 |

ENVIRONMENTAL

| | |
|---------------------------------------|--|
| Operating/Standby Temperature: | 0°C to 50°C |
| Temporary Transportation Temperature: | -10°C to 50°C for up to two days. Unit must be returned to standby/operating temperature for 24 hours before use. |
| Relative Humidity: | 5% to 95% (non-condensing) |
| Water Resistance: | IEC 60529/EN 60529 IP56 |
| Altitude | 0 – 4,575 meters |
| Shock | MIL STD 810F Method 516.5, Procedure I (40 Gs) |
| Vibration: | MIL STD 810F Method 514.5+, Category 4 Truck Transportation – US Highways, Category 7 Aircraft – Jet 737 & General Aviation (Exposure) |
| EMC: | EN 60601-1-2 |
| Radiated emissions: | EN55011 |
| Electrostatic Discharge RF Immunity: | EN61000-4-3 80MHZ-2.5GHZ (10 V/m) |
| Magnetic Field Immunity: | EN61000-4-8 (3 A/m) |
| Aircraft: | RTCA/DO-160F, Section 21 (Category M) |
| Drop Tested: | 1 metre |

ENERGY SELECTION

| | |
|-------------|---|
| Adult: | Shock 1: 150J; Shock 2: 150J; Shock 3: 200J |
| Paediatric: | Shock 1: 50J; Shock 2: 50J; Shock 3: 50J |

CHARGING TIME

| | |
|---------------------|---|
| New Battery: | Typically 150J in < 8 seconds, 200J in < 12 seconds |
| After 6 Discharges: | Typically 150J in < 8 seconds, 200J in < 12 seconds |

EVENT DOCUMENTATION

| | |
|------------------------|---|
| Type: | Internal Memory |
| Memory Capacity | 90 minutes of ECG (full disclosure) and event/incident recording |
| Playback capabilities: | Custom USB cable directly connected to PC and Saver™ EVO Windows-based data review software |

MATERIALS USED

| | |
|------------|--|
| Housing | ABS, Santoprene. Printed circuit board with electronic components. |
| Electrodes | Hydrogel, Silver, Aluminium and Polyester |

PAD PAK - ELECTRODE & BATTERY CARTRIDGE

| | |
|------------------|---|
| Shelf Life: | 4 years from manufacture date |
| Weight: | 0.2kg |
| Size: | 10 cm x 13.3 cm x 2.4 cm |
| Battery Type: | Lithium Manganese Dioxide (LiMnO ₂) |
| Capacity: | > 60 shocks at 200J 18V, 1.5 Amp Hrs |
| Electrodes: | HeartSine samaritan® disposable defibrillation pads are supplied as standard with each device |
| Placement: | Anterior-lateral (Adult); Anterior-posterior (Paediatric) |
| Active Gel Area: | 100 cm ² |
| Cable Length: | 1 metre |



DID YOU KNOW

The HeartSine 500P is the only AED which provides CPR feedback **based on assessment of the patient**



Call: 1300 308 308
Visit: www.gmacsafety.com.au

